



## DIMENSIONS

INCHES  
MILLIMETERS  
Nominal, subject to tolerance extremes.

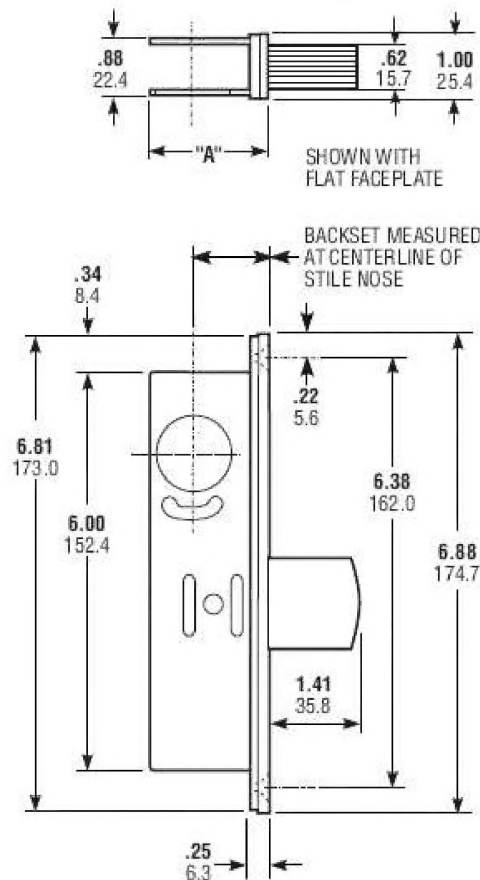

BACKSET	"A"
<b>31/32"</b> 24.6	<b>1.63</b> 41.4
<b>1-1/8"</b> 28.6	<b>1.78</b> 45.2
<b>1-1/2"</b> 38.1	<b>2.25</b> 57.1


ARMORED FACEPLATE 1" x 6-7/8"	
FLAT	MS1850S
RADIUS	MS1851S
RADIUS w/WEATHERSTRIP	MS1851SW
LH BEVEL	MS1852S-D15
RH BEVEL	MS1852S-D16




### Cylinder Cam

locks are operable by any standard 1-5/32" diameter mortise cylinder with special cam dimensioned as shown. Cylinders with cams can be readily obtained from most cylinder manufacturers.

## INSTALLATION

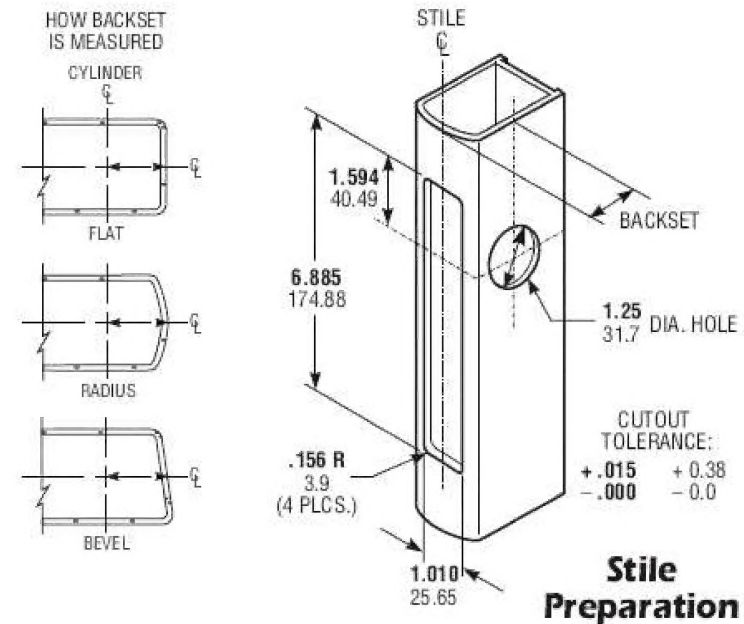

### Stile Preparation

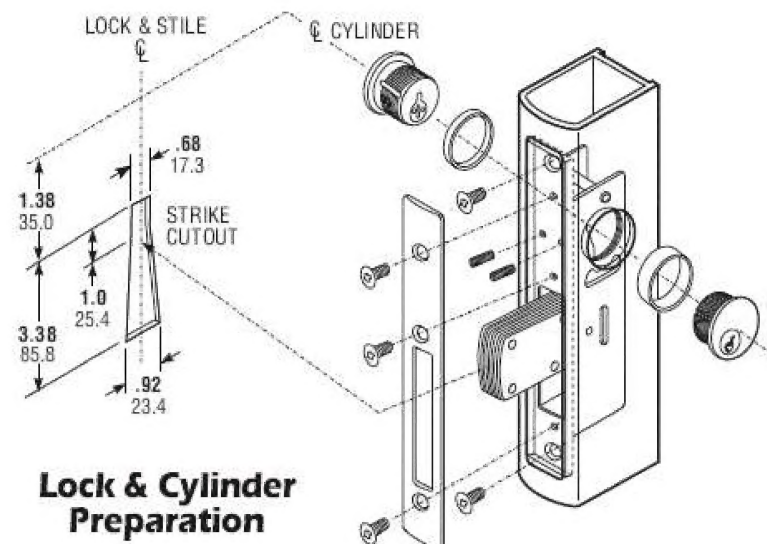

### Lock & Cylinder Preparation